

AUDIO DETECTOR

OPERATION


The FireFighter sensor is designed to listen to any smoke, carbon, or combo detector. It is one of the e-Series devices from Nice North America, providing enhanced security with encrypted communications to the control panel using the 345Mhz frequency. Once confirmed as an alarm, the FireFighter sensor will transmit a signal to the alarm control panel which, if connected to a central monitoring station, will dispatch the fire department.

WARNING: This audio detector is intended only for use with smoke, carbon and combo detectors but it does not detect the presence of smoke, carbon, heat or fire directly.

INSTALL BATTERY


Install battery (packaged separately) into FireFighter sensor base with correct polarity.

Figure 1

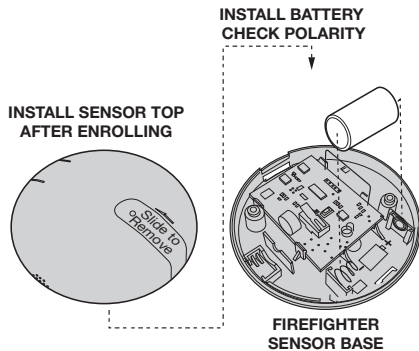

ENROLLING

Figure 2



To enroll the sensor, set your panel into program mode. Refer to your specific alarm panel instruction manual for details on these menus. For control panels with an automatic learn feature press and release the **Learn** button located in the center of the circuit board next to the tamper switch. Do not use the tamper switch to enroll FireFighter. Alternatively, the serial number can be manually entered into the panel. The number printed on the device is the serial number for the smoke detection portion, whereas for the CO portion, you simply add one (1) to that number. See Figure 1 above for location of **Learn** button.

- To enroll for fire signal detection, press and release the **Learn** button. Repeat as required. This uses Loop 1 of the serial number printed on the device. Program the sensor on the panel as sensor type 24-Hour Fire (09).
- To enroll for Carbon Monoxide signal detection, press the **Learn** button for 2 seconds. Repeat as required. This uses Loop 1 of the serial number plus 1. Program the sensor type on the panel as 24-Hour Carbon Monoxide (14).

The equipment code is "2069" for 2GIG systems See Figure 3 for location of **Learn** button.


CLOSING SENSOR (see Figure 3)

After battery is installed and sensor is Enrolled, close sensor as shown in Figure 3 and fasten together with two (2) screws (packaged separately).

MOUNTING (see Figures 4 & 5)


Included with this device is a mounting bracket, hardware and double sided tape. For proper operation ensure the side of the device with the small holes is directly facing the sounder holes on the smoke detector. Secure the mounting bracket to the wall or ceiling using the two mounting screws or double sided tape provided. Secure the sensor to the mounting bracket by sliding tabs into base of sensor. FireFighter must be mounting within 6 inches of the detector for optimal operation as shown in Figure 5.

Figure 3

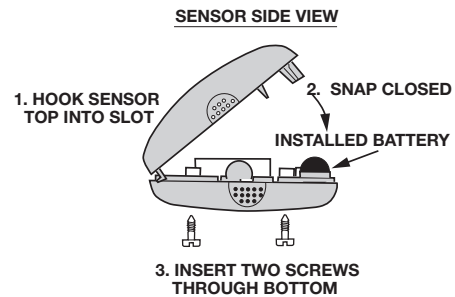


WARNING: Non-interconnected smoke detectors require an audio detector by each smoke detector sounder.

Figure 4

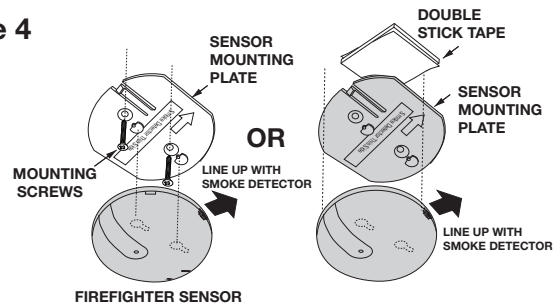

This equipment should be installed in accordance with Chapter 2 of the National Fire Alarm Code, ANSI/NFPA 72, (National Fire Protection Association, Battery March Park, Quincy, MA 02269). Printed information describing proper installation, operation, testing, maintenance, evacuation planning, and repair service is to be provided with this equipment. **Warning - Owner's instruction notice:** Not to be removed by anyone except occupant.

Figure 5

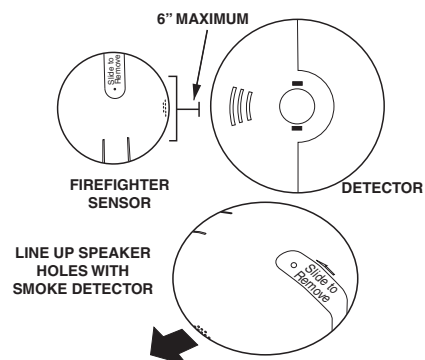

TESTING

During the first hour after powering up, the FireFighter is in test mode. This allows you to use the **Test** button on the Smoke, CO or Combo unit to test the system. After the first hour, the FireFighter requires at least two valid patterns from the detector to validate the alarm, which may not be possible via the detector **Test** button. To test the audio detection, press and hold the detector's **Test** button for at least 30 seconds to ensure that FireFighter has had sufficient time to identify the alarm pattern and lock into alarm. For combo units, the detector will typically sound the smoke temporal then the CO temporal pattern. In test mode, the FireFighter will detect both and send two transmissions to the panel. Ensure the FireFighter sensor cover is on and that you wear hearing protection.

- NOTE:** It is possible that FireFighter can hear other detectors in close proximity so it is important to choose and to install the FireFighter close to a detector that is relatively isolated from other detectors of the same type. If this is not possible, FireFighter will still function, however it will take longer to register and transmit an alarm to the panel. Detectors to avoid are typically ones mounted in hallways outside of bedrooms that will also have additional detectors nearby.
- NOTE:** This system must be checked by a qualified technician at least once every three (3) years. Please test the unit once per week to ensure proper functionality.

Legacy Smoke Detectors

All Smoke detectors should be replaced after 10 years. If you encounter a smoke detector that does not support Temporal 3 pattern, that smoke detector should be replaced as per the manufacturer recommendation. If replacement is not an option, the FireFighter can be programmed to detect non-temporal detectors.

In the mode, the FireFighter must not be located near any other audible device, like a security keypad or sounder. Those can be misconstrued as a valid smoke alarm. To enter this change the mode press and hold the tamper switch while inserting the battery. Release the tamper switch and note the LED. Repeating this action will switch the FireFighter operating mode from one to the other.

You can verify the mode FireFighter is in by simply removing the battery and replacing it. The LED will flash once or twice depending on the mode it is in.


ONE flash: Only Temporal 3 and 4 signal will trigger an alarm (Default).

TWO flashes: Generic listening mode. Will trigger after 30 seconds of continuous sounding.

REPLACING THE BATTERY

When the battery is low a signal will be sent to the control panel. To replace the battery:

Figure 6

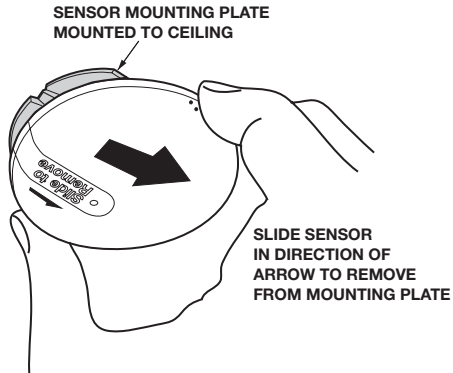

1. Slide Sensor in direction of arrow to remove from mounting plate.
2. Remove 2 screws from sensor base. Remove the top cover to reveal the battery. This will send a tamper signal to the control panel.
3. Replace with a Panasonic CR123A battery ensuring the + side of the battery faces as indicated on the device (see Figure 1).
4. Re-attach the cover, you should hear a click when the cover engages properly.
5. Re-install the two screws holding the sensor together.

WARNING: While the audio detector monitors its own battery, it does not monitor the battery in the smoke detectors. Batteries should be changed as per the original smoke detector manufacturer's instructions. Always test the audio detector and smoke alarms after battery installation to confirm proper operation.

Specifications

Transmitter Frequency	345.00 MHz (crystal controlled)
Battery	One 3Vdc lithium CR123A (1550 mAh)
Code Outputs	Alarm; Supervisory; Low Battery
Battery Life	5 Years
Detection distance	6 inches max
Operating Temperature	32° to 120° F (0° to 49° C)
Operating Humidity	5-95% RH non-condensing
Compatibility	2GIG receivers
Supervisory Interval	64 min (approx.)
Maximum current draw	23mA during transmission
Housing Material	ABS Plastic
Color	White
Regulatory Listings	FCC, IC
Equipment Code	2069
Panel Programming Sensor Loop	Loop 1

Regulatory Information

We, Nice North America LLC of 5919 Sea Otter Place, Ste. 100, Carlsbad, CA 92010, declare under our sole responsibility that the device, 2GIG-FF1E-345 complies with Part 15 of the FCC rules.

FCC Notice & ICC Notice

This device complies with Part 15 of the FCC's Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1) l'appareil ne doit pas produire de brouillage, et
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

* For more warranty and compliance information, visit our website (www.2gig.com)

Limited Warranty

This Nice North America product is warranted against defects in material and workmanship for two (2) years. This warranty extends only to wholesale customers who buy direct from Nice North America LLC or through Nice North America LLC's normal distribution channels. Nice North America LLC does not warrant this product to consumers. Consumers should inquire from their selling dealer as to the nature of the dealer's warranty, if any. There are no obligations or liabilities on the part of Nice North America LLC for consequential damages arising out of or in connection with use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation, or reinstallation. All implied warranties for functionality, are valid only until the warranty expires. This Nice North America LLC Warranty is in lieu of all other warranties express or implied.

All products returned for warranty service require a Return Authorization Number (RA#). Contact Returns at 1-855-546-3351 for an RA# and other important details.

Disclaimer

The Firefighter sensor does not detect the presence of smoke, heat, or fire directly. It relies solely on the presence of an audio alarm signal generated by an existing smoke or fire detector in proximity to the Firefighter sensor to make such a determination. The Firefighter™ sensor must be used with smoke detectors certified according to UL Standards, and in strict accordance with the installation and operation instructions provided with such detectors. It is the owner's responsibility to ensure that smoke or fire detectors used in conjunction with the Firefighter sensor are maintained and tested on a regular basis in accordance with the manufacturer's instructions. Nice North America expressly disclaims any responsibility for the failure of the Firefighter sensor to detect the presence of smoke or fire due to the failure of any smoke or fire detector used in conjunction with the Firefighter sensor to operate properly due to any condition, including improper installation, operation, maintenance or testing of such smoke or fire detector.



5919 Sea Otter Place, Suite 100
Carlsbad, CA 92010 USA

For technical support in the USA and Canada:

855-2GIG-TECH (855-244-4832)

Email: 2GIG.Linear@niceforyou.com

Visit Niceforyou.com for technical support hours of operation.

For technical support outside of the USA and Canada:

Contact your regional distributor.

Visit www.2gig.com/dealers for a list of distributors in your region.



Niceforyou.com

©2023 Nice North America LLC. 2GIG is a registered trademark of Nice North America LLC. All rights reserved.